

3M X 3M PORTABLE BUILDING KIOSK

WHITE FRAME - SPTU220030 - 8 EX HIRE

Purchase Price - \$19,995 + GST

Hire Price (minimum 1 week) - \$950 per week

Pricing excludes delivery - quoted on request



Building Inclusions:

-  9 sqm (3m x 3m unit)
-  1x Kiosk window
-  1x right-hand swing door
Carbon structural steel & weathering steel, electro-galvanised & protected with zinc rich primer+ polyurethane topcoat
-  Internal walls are powder-coated (off-white gloss), galvanised sheet metal
-  Commercial grade vinyl flooring
-  Insulated with fire retardant rockwool (72 mm walls, 100mm floor and ceiling)
-  4x 10-amp standard twin power outlets, external C-Form 32amp connection, switchboard
-  1x LED baton lights

An engineered building system suitable for a variety of spaces, including site and commercial offices, information hubs, ticketing, retail, food and beverage and merchandise service booths.

Additional inclusions:

- Electrical WOF - 4 years, issued prior to delivery
- Sales multi-part new building warranty is included with this building

Exclusions:

Delivery and installation, adaptations, site or groundworks, and joining kit if connecting buildings. Please enquire for a quote.

Optional adaptations:

Options are limited to branding or signage for rental kiosks - please enquire for a price.

Condition:

This building is in good condition with only minor imperfections, we note some staining on the internal floor. Any defects or damages will be noted on inspection.

Pre-purchase inspection:

We encourage inspections of all our buildings before lease or purchase; please call us to make an appointment.




WALL PANELS:
 EXTERIOR CLADDING:
 PROFILED GALVANISED SHEET METAL - 0.5mm
 INTERIOR CLADDING:
 PROFILED GALVANISED SHEET METAL - 0.5mm
 INSULATION:
 69mm ROCK-WOOL (DENSITY 110 - 120KG/M)

FRAME:
 ROOF: 1.6MM CORRUGATED STEEL PANELS
 HEADER: 3MM WELDED STEEL PROFILE
 COLUMN: COLD ROLLED 3.0MM STEEL PROFILE
 BASE: COLD ROLLED , WELDED 4MM STEEL PROFILE


PAINT SPECIFICATION:
 TOP AND BOTTOM FRAME:
 ELECTROGALVANISING: ZINC 10 MICRONS
 PRIMER COATING: ZINC RICH 20 MICRONS
 TOP COATING: POLYURETHANE TOP COAT 50 MICRONS
 TOTAL DRY FILM THICKNESS - 80 MICRONS

CORNER CASTING AND CORNER POST:
 SHOP PRIMER: ZINC RICH 10 MICRONS
 PRIMER COATING: ZINC RICH 20 MICRONS
 TOP COATING: POLYURETHANE TOP COAT 50 MICRONS
 TOTAL DRY FILM THICKNESS - 80 MICRONS

FRAME PAINT: BLACK OR WHITE OPTIONS @ BRIGHTNESS 70-80

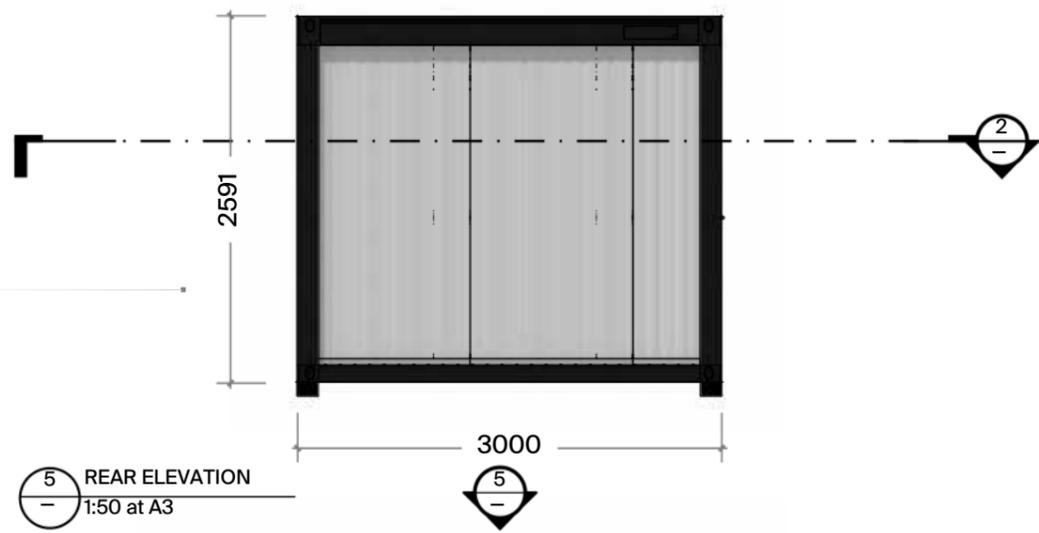


5 REAR ELEVATION
 1:50 at A3

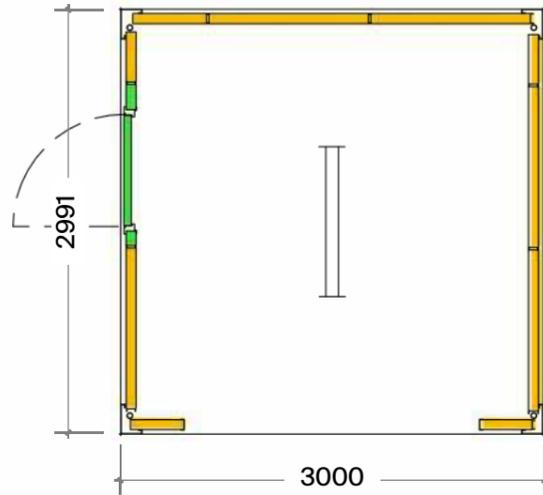


2 SECTION - PLAN VIEW
 1:50 at A3




1 PERSPECTIVE VIEW
 Not to Scale

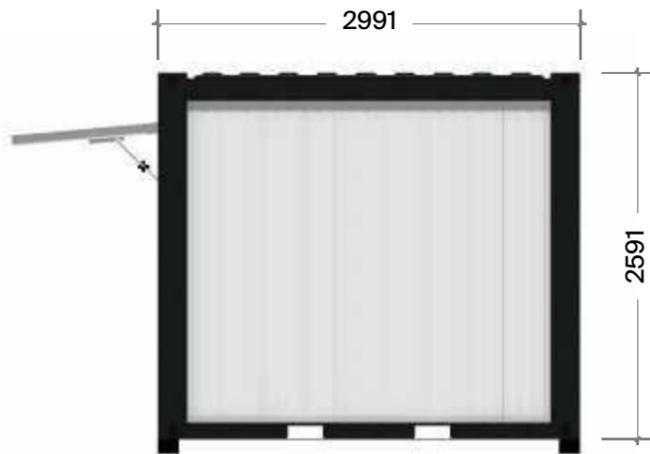

4 LHS ELEVATION
 1:50 at A3

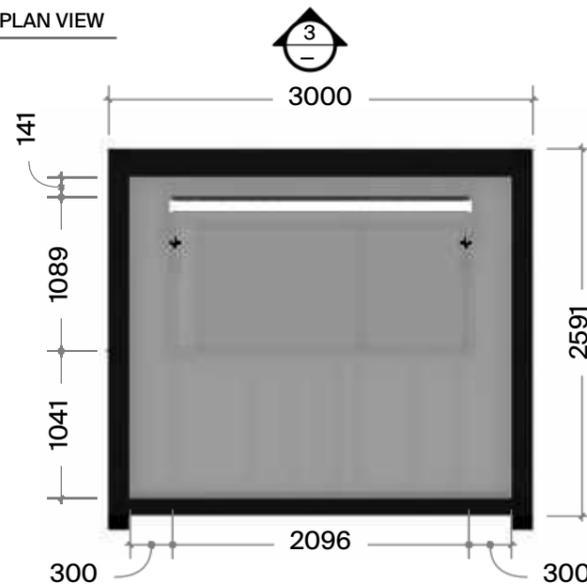

3 FRONT ELEVATION
 1:50 at A3

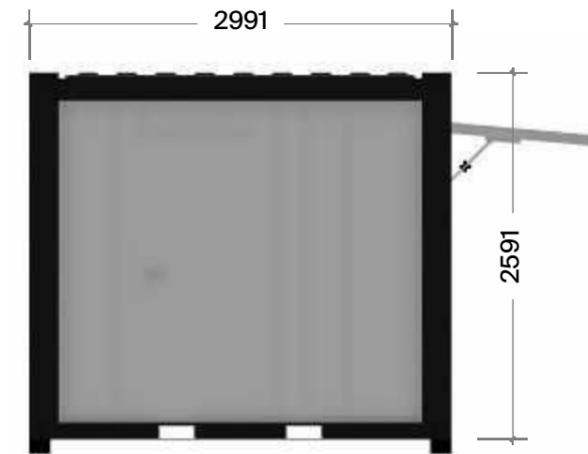

6 RHS ELEVATION
 1:50 at A3

-  DOUBLE POWER POINT
(300MM ABOVE FLOOR LEVEL
UNLESS OTHERWISE STATED)
-  LIGHT SWITCH
-  LED STRIP LIGHT
-  MAIN SWITCHBOARD
-  32A CEE 3P CONNECTION

1 FLOOR PLAN
- 1:20 at A3

